




THE STYLE OF 2020

HN SPC FLOORING

NEW STYLE
NEW WORLD
NEW GENERATION

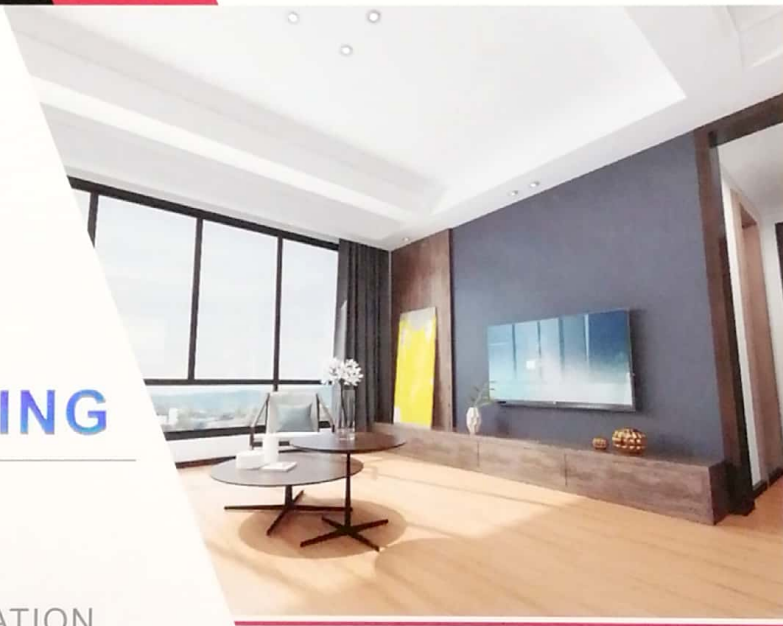



HOME NICE SPC FLOORING

SPC CLICK FLOORING

Rigid Core LVT CLICK

Dimension	1220 x 180mm
Construction	New Generation of Luxury Vinyl Tiles, mixture by Natural Limestone Powder, polyvinyl chloride, stabilizer etc. Density 2000kg/m ³
Thickness	6.5mm
Wear Classification	0.5mm
Surface structure	Deep embossed
Edge type	Micro Bevel
Locking system	Click installed; 2G or 5G optional; Unilin patented;

Properties	Test Method	Unit	Test Result		Remarks
Dimensional stability	With reference to BS EN ISO 23999:2012	%	Manufacturing direction	0.06	Heating temperature: 80 °C Heating time: 6h
			Across-manufacturing direction	0.03	
Curling after exposure to heat		mm	0		
Peel Resistance	BS EN ISO 24345:2012	N/50mm	Machine direction	80	Loading rate: 100mm/min
			Across machine	75	
Residual indentation	EN ISO 24343-1:2012	mm	0.06		
Staining and resistance to chemicals	EN ISO 26987:2012	/	not affected		
Wear resistance	EN 660-2: 1999+A1:2003 and EN	/	Wear group: T		
Color fastness to light	EN ISO 105-B02:2014	/	Grade (Bluewood Std) 6		
Effect of a castor chair	EN 425:2002	/	No visible damage		Cycles:25000, load: 90kg
Slip resistance	DIN 51130:2014-02	/	Critical angle of inclination: 1	R10	
RoHS Directive 2011/65/EU	IEC 62321		Not Detected		
Phthalates	EN14372:2004		Not Detected		
REACH	Regulation (EC) No 1907/2016 REACH	%	According to the specified scope and evaluation screening, the test results of SVHC are less than 0.1%(w/w)		169 Substances of Very High Concern(SVHC) for authorization by European Chemicals Agency(ECHA) on and before Jun 20,2016 were Not Detected.





HS1001



HS1002



HS1003



HS1004



HS1005



HS1006



HS1007



HS1008



HS1009



HS1010



Water Proof



Termite Proof



Flame Retardant



Spill & Stain Resistant

SPC FLOORING
NEW 2G CILCK SYSTEM
SIZE:1220*180*6.5 MM



HS1011




HS1012



HS1013



HS1014

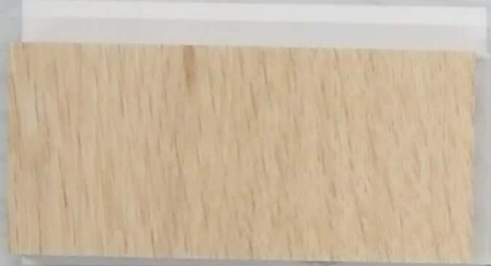

HS1015



HS1016



HS1017



HS1018



HS1019



HS1020



Anti-Slip



Wear Resistant



Enhanced
Sound Reduction



Easy Installation
(Clip Type)