



uniwood

複 合 木 地 板
Engineered Wood Flooring



產品背景和介紹

PRODUCT BACKGROUND & INTRODUCTION

我們是誰？

Who we are?



Uniwood 來自一家成立於近半個世紀前的家族企業。憑藉在木工方面豐富的經驗和專業知識，我們多年來穩步發展。我們的成功主要歸功於我們創辦人的遠見，他在兩個孩子的支持下仍然掌管著公司。我們的母公司 GEMWOOD 在英國、美國、中國、日本、韓國、印尼、西班牙、義大利、墨西哥和歐盟擁有強大的國際影響力。我們一直向樂器製造業的一些頂級品牌出口樂器用聲木——Taylor Guitars、CF Martin、Fender 和 Gibson。

Uniwood, comes from a family-run company founded almost half a century ago. We have grown steadily over the years based on our rich experience and expertise in woodworking. Our success is primarily due to the vision of our founder, who is still at the helm of the company, supported by his two children. Our parent company, GEMWOOD, has a strong international presence in the UK, USA, China, Japan, Korea, Indonesia, Spain, Italy, Mexico and the EU. We have been exporting tonewood for musical instruments to some of the top names in the musical instrument manufacturing world - Taylor Guitars, CF Martin, Fender and Gibson.

木地板

Wood Flooring

沒有什麼比每天早上起床時踩在天然木材上的感覺更好了。

木材是一種生氣勃勃的材料，可以立即給任何房間或環境帶來溫暖和個性的感覺。

Nothing beats the feeling of stepping on natural wood when you get off the bed every morning. Wood is a lively material, giving an instant feeling of warmth and personality to any room or environment.



耐用 Durable

複合木地板具有真正的硬木頂層和多層實木芯。再加上環氧樹脂的防水底層，使得工程地板非常適合任何氣候——包括高濕度和乾燥地區。

Engineered Wood Floors have real hardwood top layer with solid wood core. This, along with the water proof bottom layer of Epoxy, makes Engineered flooring perfect for any climate – including high-moisture and dry areas.



易於維護 Easy to maintain

複合木地板的油漆耐磨度高，並持久力強。它非常耐用，而且在其使用壽命內可以進行多次翻新。

Engineered wood floors are wear-resistant and have a long-lasting finish. It is extremely durable and can be refinished several times over its lifetime.



快速輕鬆地安裝 Fast & easy installation

由於複合木地板已預塗飾面，並採用互鎖設計，可以將各個部件鎖定在一起，使其安裝非常容易。它甚至可以在現有地板上安裝，而不會造成破壞。

Since engineered wood flooring comes prefinished, with an interlocking design that allows the pieces to lock together, installation is very easy. It can even be installed over an existing floor without breaking it.

產品資訊

PRODUCT INFORMATION

木地板設計

Wood Flooring Designs

複合木地板和薄片由多種天然木材製成，提供多種木板長度、寬度和紋理選擇。


Engineered wood flooring and lamella made from a wide selection of natural wood come with multiple selections of plank length, width and textures.



3

產品結構

Product Structure

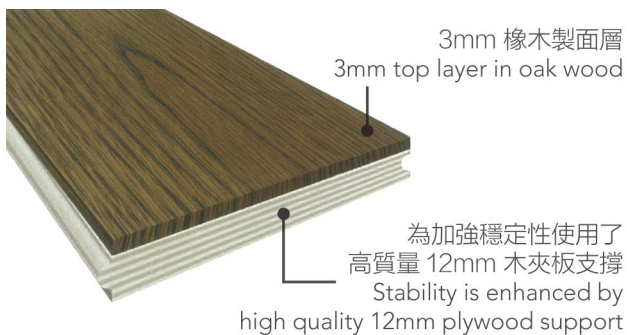

複合地板由多層木材製成粘在一起而成為一塊板。裝飾面層是木頭，底層通常是船用級膠合板。它是採用類似於標準條形地板的互鎖榫槽系統製成的。

Engineered floors are made of multiple layers of wood that are glued together as one board. The top decorative layer is wood. The bottom layer is usually marine grade plywood. It is made with an interlocking tongue and groove system similar to standard strip flooring.

木材品種


Wood Species



橡木 / 熱橡木
Oak / Thermo Oak



歐洲胡桃木
European Walnut

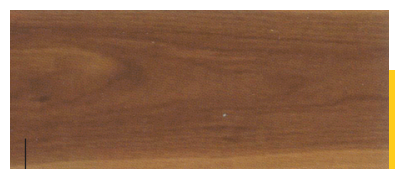


美國胡桃木
American Walnut



美國榆木
Elm



落葉松木
Larch

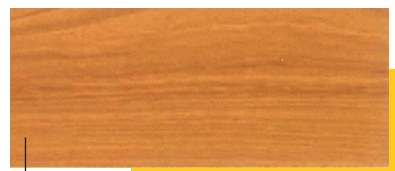

緬茄木
Doussie



黃金柚木
Iroko



緬甸柚木
Teak Burma




非洲崖豆木
Wenge

產品顏色

PRODUCT COLOURS

4

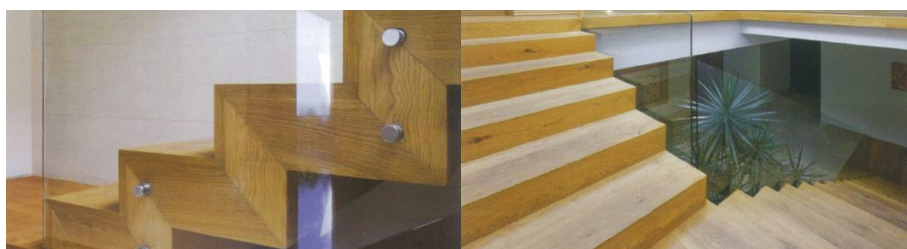

可以特別訂造不同款式及尺寸的樓梯地板。

Stair Floorings in different styles and sizes can be specifically customised.

木材冷知識

TRIVIA OF WOODS


木地板的表面處理

Surface Treatment of Wood Flooring

大多數木材都可以進行正常的表面處理。木材的表面處理旨在提高耐用性，同時也用於裝飾目的。不同的表面處理代表了各自的性質和設計。光滑的表層可以透過細刨或塗刷表面後來獲得。最近，鋸切面也非常適合且成熟地用於表面處理。

Most of wood can be surface treated normally. The surface treatment for the wood aims at increasing the durability and is also conducted for decorative purposes. Different surface treatments represent their own natures and designs. The coat of varnish applied to it can be obtained by smooth-planing it or by brushing the surface. Recently, the sawn cut surface is also well-suited and mature for surface treatment.

5

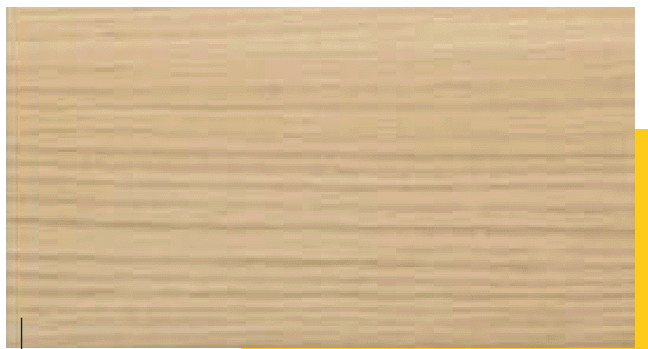

砂磨 Sanded

手工打磨賦予表面光滑的觸感和均一的外觀，凸顯了簡約之美。已預先砂磨的表面非常適合使用中性清漆和中性蠟油進行飾面。

The beauty of simplicity is exalted by hand planing the wood to give the surface a smooth touch and uniform appearance. Pre-sanded surfaces are ideal for finishes with neutral varnish and neutral wax oil.



鋸切 Sawn Cut

透過重新審視傳統工藝和使用舊式鋸刀，我們創造了一種增強粗糙感的紋理飾面，適合典型的凹槽和條紋或手工鋸切木板。


By revisiting traditional processes and using old saws, we have created a textured finish that enhances the roughness. It is suitable for typical grooves and stripes, or hand-sawn cut wooden boards.



塗刷 Brushed

使用特殊的刷子可以巧妙地去掉木質表面最柔軟的部分，從而在不破壞纖維的情況下顯露出天然紋理。經塗刷上漆的地板具有巨大優勢，因為經塗刷的表面不會有任何肉眼可見的刮痕。

Special brushes that delicately remove the softest part of the wooden surface are used to reveal the natural grain without spoiling the fibers. There is a huge advantage of brushed and lacquered flooring because the surface is brushed without any scratches being apparent to the naked eye.

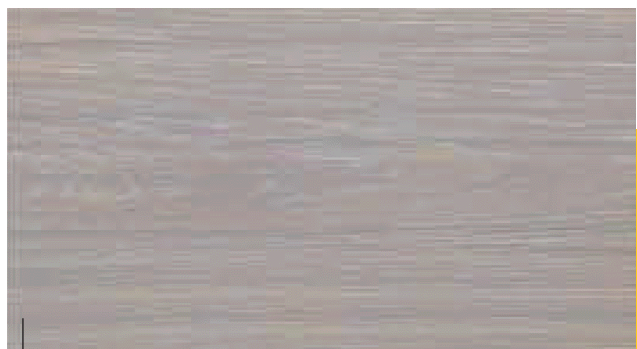

人手刨木 Hand planed

這種精妙的處理仍然是由工匠大師的雙手完成的。小刨木機被用來打造一個稍微鏤刻的不規則表面，給人一種古色古香、質樸的感覺，該處理方法在美國和歐洲非常有名。

This skillful treatment is still performed by the hands of master craftsmen. Small planes are used to create a slightly gouged irregular surface that gives an antique, rustic touch. The treatment is very famous in the USA and Europe.

木材冷知識

TRIVIA OF WOODS

人字/魚骨式鋪法

Herringbone Pattern

6



90° 人字圖案
90° Herringbone Pattern



45° 魚骨圖案
45° Herringbone Pattern

木材等級

Grading of Wood



精選等級
Select Grade

精選等級的色澤均勻和表面均稱，只有最少和最細的木節。

The select grade is with even colour and uniform surface. It has minimal and tiny knots only.



經典等級
Classic Grade

經典等級有更多自然特徵，例如木節、邊材和顏色差異。它們被選擇的原因是能夠為房間帶來這些自然特徵。

The classic grade has more natural characteristics such as knots, sapwood and colour variation. It is chosen because of these natural feature they bring to a room.



鄉村等級
Rustic Grade

鄉村等級具有最強烈的色彩和紋理。它包括大的裂縫和木節，並且有強烈的色彩漸量對比。木節和裂縫可以用選定的顏色填充劑來填充顏色。

The rustic grade has the strongest colour and grain texture. It includes big cracks and knots, and there is a strong contrast of colour shading. The knots and cracks may be colour-filled with selected colour filler.

保養

MAINTENANCE

清潔指引

Cleaning Instruction

步驟 Step


- 1 小心擺放家具，不要推動（有刮花的風險）
Arrange your furniture carefully without pushing (risk of scratching)
- 2 用吸塵器或刷子清除顆粒
Remove particles with a vacuum cleaner or a brush
- 3 建議在入口處使用地毯
Door mats are recommended at entrances
- 4 椅腳和桌腳的毛氈墊可防止刮花
Felt pads under chair and tables legs prevent scratching
- 5 請使用濕拖把清潔地板和放置墊子
Please use the wet mop up to clean the floor and underlay mats



清潔方法

Cleaning Method


表面塗層 Coating	清潔方法 Cleaning Method	
蠟油 Wax Oil	乾洗 Dry Cleansing	日常清潔時，你應該使用掃帚、吸塵器或除塵拖來清潔表面。 For day to day cleaning, you should use either a broom, a vacuum cleaner or dust mop to clean the surface.
	定期濕拖 Regular Damp Mopping	地板清潔劑可以去除木地板上大部分的日常污漬。可以將其稀釋以適應表面的污垢程度，然後使用濕拖把塗抹。 The floor cleaner removes most day to day stains from your wooden floor. It can be diluted to suit the level of soiling on the surface and applied using a damp mop.
紫外線光固化油 UV Oil	濕拖 Wet Mopping	使用中性清潔劑濕拖地板表面並晾乾。如有需要，使用保養油清潔，並在木地板上重新塗抹一層薄薄的保護油。 Use neutral cleansing agent to wet mop the floor surface and leave it to dry. If needed, use maintenance oil to clean and reapply a protective thin layer of oil on the wood floors. *切勿頻繁使用保養油；否則，木地板表面會變得過滑。 *Don't use the maintenance oil too frequently; if not, the wood floor surface will become too slippery.
紫外線光固化塗料 UV / XUV	濕拖 Wet Mopping	使用中性清潔劑濕拖地板表面並晾乾。 Use neutral cleansing agent to wet mop the floor surface and leave it to dry.

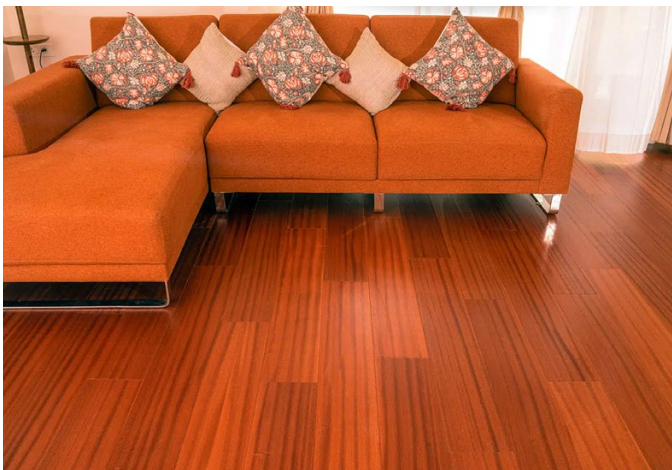

示範圖片

DEMO PICTURES


8

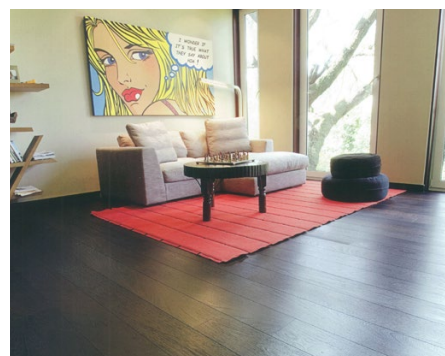

工程案例

PROJECT SHOWCASE

9

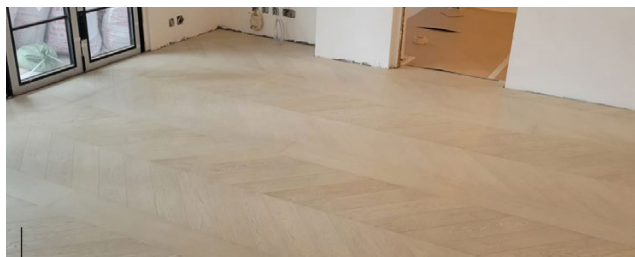

麥當勞道 MacDonell Road

尺寸 | T15 × W125 mm (魚骨圖案 Herringbone
Size | Pattern) + T15 × W190 × L1800 mm


選材 | 白橡木 / 塗刷 / 手工上色
Materials | White Oak / Brushed / Handpaint



淺水灣 Repulse Bay

尺寸 | T15 × W190 × L1800 mm
Size |


選材 | 淺色橡木 / 塗刷 / 手工上色
Materials | Light Oak / Brushed / Handpaint

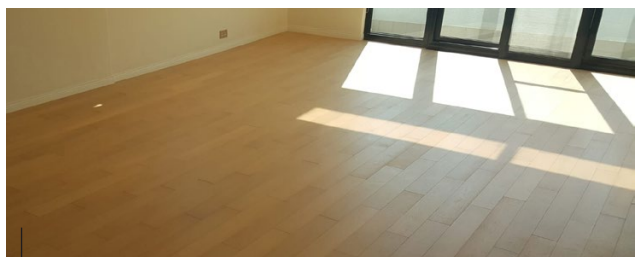

山頂 Peak

尺寸 | T15 × W150 × L1800 mm
Size |


選材 | 淺色橡木 / 塗刷 / 手工上色
Materials | Light Oak / Brushed / Handpaint

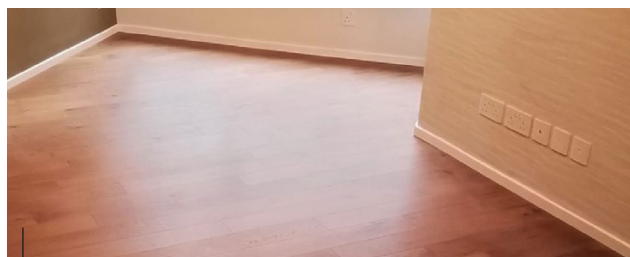

九龍塘 Kowloon Tong

尺寸 | T15 × W150 × L1800 mm
Size |


選材 | 胡桃木 / 手工上色
Materials | Walnut / Handpaint

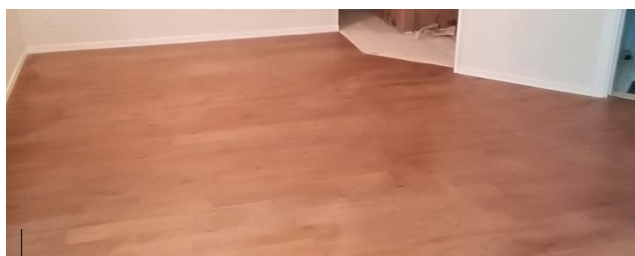

半山區 Mid Levels

尺寸 | T15 × W150 × L1800 mm
Size |

選材 | 榆木 / 手工上色
Materials | Elm / Handpaint

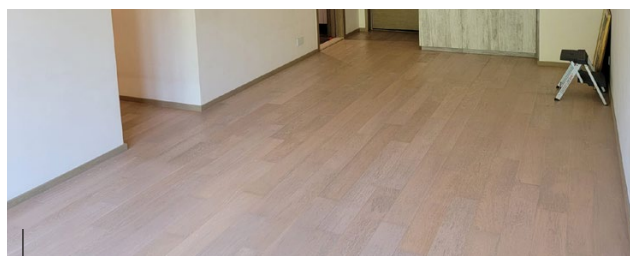

跑馬地 Happy Valley

尺寸 | T15 × W150 × L1800 mm
Size |

選材 | 白橡木 / 塗刷 / 手工上色
Materials | White Oak / Brushed / Handpaint

技術資料 Technical Data

檢測報告 Test report

地板種類 Type of flooring

尺寸 Dimension

面層 Top layer

抗彎強度 Modulus of rupture

彈性模量 Modulus of elasticity

甲醛釋放量 Formaldehyde emission

耐磨性 Abrasion resistance

含水量 Moisture content

SQ082035

雙層複合地板 Two layer parquet

複合木 Plywood / 橡木 Oak

15/16 × 90-250 × 600-1800 mm

3mm

57.2MPa (平均 average ≥ 30MPa)

48.3MPa (最低 minimum ≥ 24MPa)

5420MPa (≥ 4000MPa)

≤ 1.5mg/L

0.113g/100r (≤ 0.15)

11.7% (5~14%)